



AirWave

Wireless Lavalier Microphone

Mini

User Manual

K1

AirWave ((USB-C)



AirWave (Lightning)



AirWave (Camera)



K2

AirWave ((USB-C)



AirWave (Lightning)




① Charging case

- Indicator

When the case is charging : ※ Flashing ●

Charging case power status	Indicator
Less than 25%	● ○ ○ ○
25%-50%	● ● ○ ○
50%-75%	● ● ● ○
75%-100%	● ● ● ●
100%	● ● ● ●



USB-C Charging Port

② TX



2s ON/OFF

x1 /

x2 Noise Cancellation

x3 Echo

Charging Contacts

Noise Cancellation Indicator



Echo Indicator



Static blue light

TX and RX connected

Flashing blue

TX and RX not connected

Flashing red

Low battery

Static red light

Mute

Static green light


Charging

Green light OFF


Fully charged

② RX

Smartphone Version (USB-C/iOS Lightning)

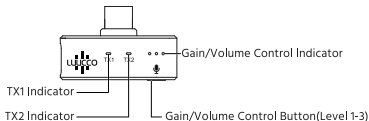

Camera Version

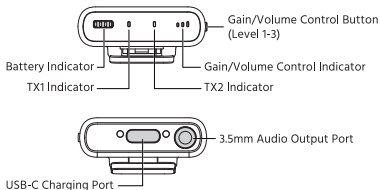


Product Usage

① How to Wear



② Charge TX separately



Product Usage (Mobile Version)




USB-C




iOS Lightning

Charge the external device while using



Product Usage (Camera Version)

Connect RX to camera



Specifications

Wireless	Digital 2.4GHz
Transmission	Omnidirectional
Built-in Microphone	Frequency Range: 50Hz-20kHz
Sensitivity	-35dB±2dB@1KHz
Sound delay	< 20ms
Signal to noise ratio	> 80dB
Bit Depth	24 bit
Sampling Rate	48 kHz
Operation Range	100m (328ft) (Line of Sight)/30m (100ft) for NLOS
Battery Capacity	TX: 80 mAh
	Charging case: 400 mAh
Operating Time	TX: 6 hours
	Charging case: >15 times charging
Charging Time	1.5 hours
Weight	TX: 8g(0.28oz) Smartphone RX: 4g(0.14oz)
Size	Charge case: 90 x 42 x 67(3.5" x 1.7" x 2.6")
	TX: ϕ 24 x 10.3mm(0.9" x 0.4")
	Mobile Version RX: 34.5 x 13 x 8.2mm(1.4" x 0.5" x 0.3")
	Camera Version RX: 36 x 22.8 x 16(1.4" x 0.9" x 0.6")



www.luuccotech.com

Manufacturer: Luucco (Shenzhen) Technology Co., Ltd.

Factory Add.: No. 13/14, Building 9, Huake City Incubation Park,
Daojiao Town, Dongguan City, Guangdong, China

Email: sales@luuccotech.com

www.luuccotech.com